

FIGURE 1

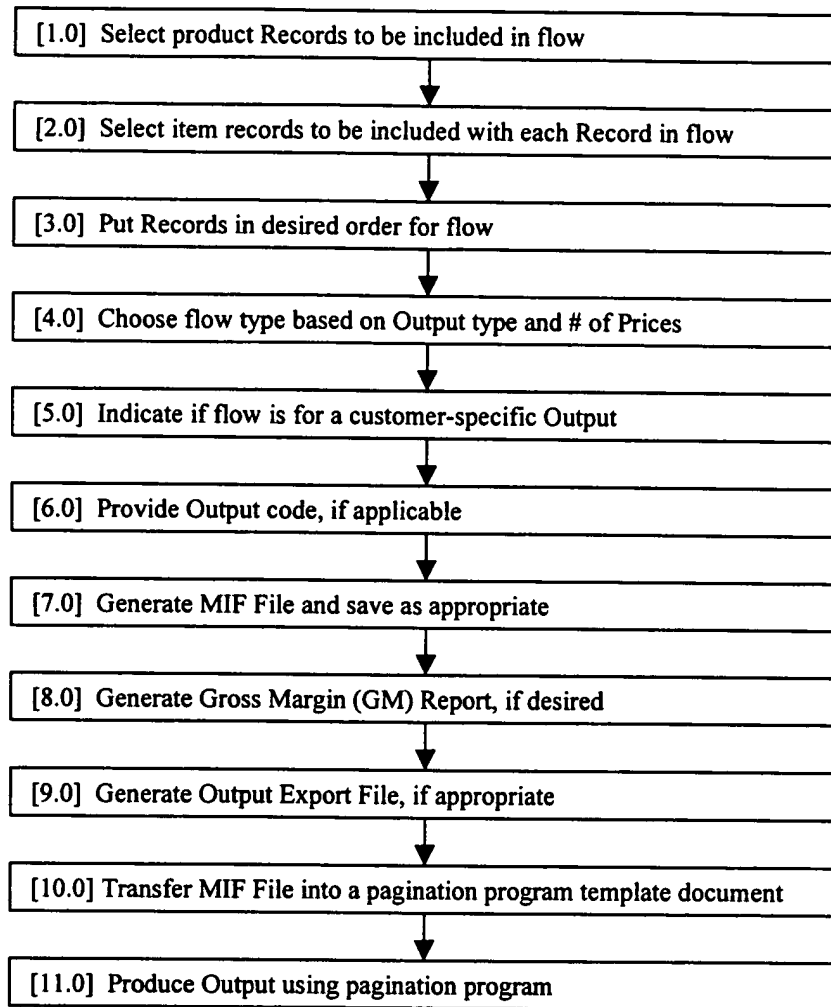


FIGURE 2

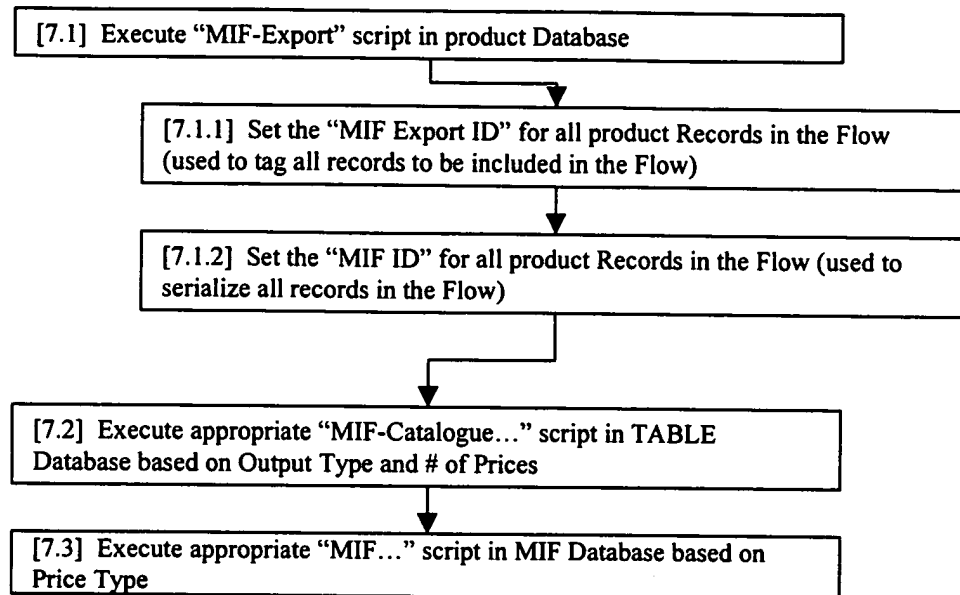


FIGURE 3

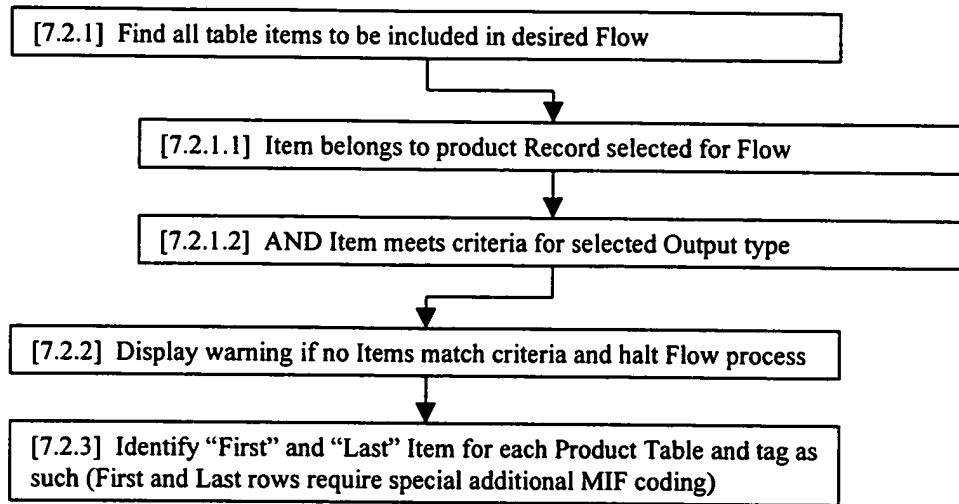


FIGURE 4

```
graph TD; A["[7.3.1] Import Aframe records from product Database"] --> B["[7.3.1.1] Import 1 record from product Database for each product Record in flow; MIF code contains image path, filename, and dimensions"]; B --> C["[7.3.1.2] Tag first record for special MIF coding"]; C --> D["[7.3.1.3] Add new record for MIF header coding and assign sequence #1"]; D --> E["[7.3.2] Import item Records from table Database according to price type"]; E --> F["[7.3.2.1] Import 1 record from table Database for each item Record in flow"]; F --> G["[7.3.2.2] MIF Code is determined by price type and whether the item is the first row, middle row, or last row of product table"]; G --> H["[7.3.2.3] Tag first Record for special MIF coding"]; H --> I["[7.3.2.4] Tag all item Records with 'MIF Export ID'"]; I --> J["[7.3.3] Import textflow Records from product Database"]; J --> K["[7.3.3.1] Import 1 record from product Database for each product Record in flow; MIF code contains product header, index marker, features, Aframe ID, and Table ID"]; K --> L["[7.3.3.2] Tag first and last records for special MIF coding"]; L --> M["[7.3.4] Export all records in MIF Database and reinitialize Database"];
```

The flowchart illustrates the MIF Database Initialization Process, which follows these steps:

- [7.3.1] Import Aframe records from product Database
 - [7.3.1.1] Import 1 record from product Database for each product Record in flow; MIF code contains image path, filename, and dimensions
 - [7.3.1.2] Tag first record for special MIF coding
 - [7.3.1.3] Add new record for MIF header coding and assign sequence #1
- [7.3.2] Import item Records from table Database according to price type
 - [7.3.2.1] Import 1 record from table Database for each item Record in flow
 - [7.3.2.2] MIF Code is determined by price type and whether the item is the first row, middle row, or last row of product table
 - [7.3.2.3] Tag first Record for special MIF coding
 - [7.3.2.4] Tag all item Records with "MIF Export ID"
- [7.3.3] Import textflow Records from product Database
 - [7.3.3.1] Import 1 record from product Database for each product Record in flow; MIF code contains product header, index marker, features, Aframe ID, and Table ID
 - [7.3.3.2] Tag first and last records for special MIF coding
- [7.3.4] Export all records in MIF Database and reinitialize Database

FIGURE 5